

CONTRAIL[®]

by **TOWMASTER**

MODELS:
C-20, C-24

The Standard for the Road Ahead!



Some equipment shown may be optional



Dexter slipper-spring suspension provides the capacity you need at a budget price.



Self-cleaning angle iron beavertail gives grip to equipment when loading.



Off-the-ground spring assist helps lift the ramp when putting them in storage position.

Description:

Get great value with these Contrail[®] deck-over trailer models. The Contrail[®] C-20 and C-24 are built on heavy-duty frames and feature the basics you need without breaking your budget; adjustable hitch, slipper-spring suspension, off-the-ground spring-assist ramps, oak wood deck and sealed wiring and lights. If you need a budget trailer to haul your equipment, the Contrail[®] C-20 and C-24 is the perfect investment.

Quick Specs:

- 36" deck height (empty)
- 8'-6" deck width
- Oak wood deck
- Dexter spring suspension
- Electric brakes (air optional)
- Adjustable hitch
- One-way spring-assist ramps
- Sealed wiring

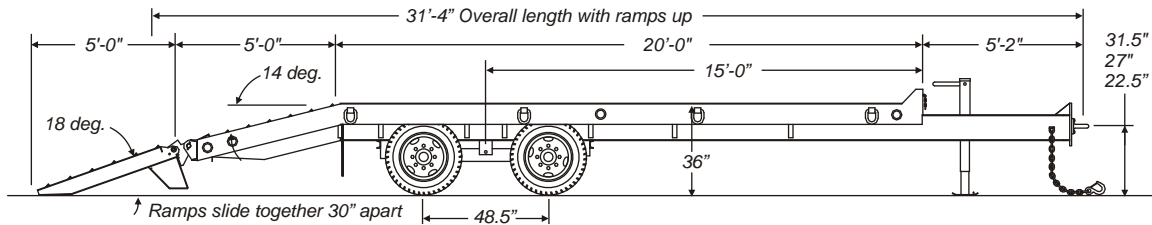


Towmaster, Inc.

800-462-4517

Fax: 320-693-7921

Your authorized Towmaster[®] dealer.


SPECIFICATIONS

S=Standard O=Optional

CAPACITY / DIMENSIONS	C-20		C-24	
	Capacity Rating (lbs/kg)	20,000 / 9072	24,000 / 10,866	
Approx. Weight (lbs/kg)	5,990 / 2717	6,830 / 3098		
Deck Height (empty) (in/mm)	36 / 914	36 / 914		
Deck Length (ft-in/mm)	20-0 / 6096	20-0 / 6096		
Overall Width (ft-in/mm)	8-6 / 2591	8-6 / 2591		
Overall Length (ft-in/mm)	31-4 / 9550	31-4 / 9550		
TONGUE				
Tongue Length (ft-in/mm)	5-2 / 1575	5-2 / 1575		
One-Piece Cold-Formed Tongue	S	S		
Adjustable Hitch	S	S		
3" Pintle Ring	S	S		
High-Tensile Safety Chain (size - in)	3/8 x 40, Grade 43	1/2 x 40, Grade 70		
Storage Tray	S	S		
Lockable Storage Tray Lid	O	O		
Bolt-on Drop-Leg Parking Jack	12K	12K		
Bolt-on Two-Speed Parking Jack	O (25K)	O (25K)		
FRAME / RAMPS				
Main Beam	W10 x 17 Grade 50	W10 x 17 Grade 50		
High-Tensile 3" Jr. I-beam Crossmembers	S	S		
Crossmembers 16" on-center	S	S		
Headboard (in/mm)	5.5 / 140	5.5 / 140		
Side Rails (in/mm)	8 / 203	8 / 203		
Oak Wood Deck	S	S		
Tie Downs	Forged D-rings	Forged D-rings		
Number of Tie-Downs (Total / Side)	8 / 4	8 / 4		
Beavertail (ft-in / mm) (angle-degrees)	5-0 / 1524 (14)	5-0 / 1524 (14)		
Ramps (ft-in x in/mm)	5-0 x 21 / 1524 x 533	5-0 x 21 / 1524 x 533		
Off-The-Ground Spring-Assist	S	S		
Two-Way Spring Assist	O	O		
SUSPENSION / TIRES				
Slipper-Spring Suspension	S	S		
Dexter General-Duty Axles (number of axles)	S (2)	-		
Dexter Heavy-Duty Axles (number of axles)	-	S (2)		
Axle Capacity (each) (lbs/kg)	10,000 / 4535	12,000 / 5443		
Oil Bath Hubs	S	S		
Electric Brakes	S	S		
Air Brakes	O	O		
Brake Size (in/mm)	12.25x3.38 / 311x86	12.25x5 / 311x127		
Budd-type Wheels (in/mm)	16x6 / 406x152	16x6 / 406x152		
Wheel Bolt Pattern	8-bolt	8-bolt		
Tires / Load Range Rating	235/85R x 16 / E	235/85R x 16 / E		
Poly Mud Flaps	S	S		
WIRING / FINISH				
Weather Resistant Sealed Wiring	S	S		
Weather Resistant Lights	S	S		
Incandescent Type Lights	S	S		
Registration Holder	S	S		
Rust Inhibiting Primer	S	S		
Durable, Rust Resistant Top Coat	S	S		
Durable, Die-Cut UV Resistant Vinyl Decals	S	S		
Subject to F.E.T.	N	Y		

Follow local and Federal D.O.T. laws, including Federal Motor Carrier Safety Regulations §392.9, §393.100 and §393.102, and stay within GVWR restrictions.

OPTIONS

Additional deck length	Spare tire/rim	Angelim Pedra wood deck
Additional tie downs	Spare tire carrier	Dual parking jacks
8'-0" deck width	Stake pockets and rub rail	25K two-speed parking jack
6'-0" beavertail w/6'-0" ramps (15 deg. Load angle)	Storage tray lid	Special color (no metallic)
Double-break beavertail	Two-way spring-assist	LED lights
Gooseneck	Winch and cable	

We manufacture a complete line of trailers in capacities from 2000 lbs. to 120,000 lbs. Listed weights are approximate. Trailer weights can vary due to options installed. All dimensions are approximate. See VIN tag for actual GVWR. Check our website or see your authorized dealer for more information. Manufacturer reserves the right to modify, change or discontinue models or options as seen fit without obligation to previously sold units. Written warranty covers each trailer.

Towmaster, Inc., 61381 US Hwy 12, Litchfield, MN 55355
 Toll free: 800-462-4517 phone: 320-693-7900 fax: 320-693-7921
 www.towmaster.com
 Employee Owned, Employee Pride, U.S.A. Made!
 U.S.A. DESIGNED AND BUILT

Photos may not show most recent changes to models.